



Nylon Cable Tie

Nylon Cable Tie

Fastener

Marker , Pipe

Wire Duct

PVC Tubes

Cable Clamp
& Clip


Stainless Steel
Cable Tie

1.1 Cable Ties

1.1.1 Nylon Cable Ties

Material: PA66

Flammability rating: UL94V-2

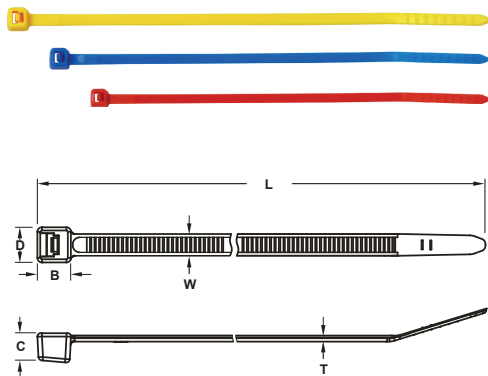

ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
K-80M	80	2.5	4.5	3.8	4.5	1	1.6	15	18	100 PCS
K-90M	96	2.5	4.5	3.8	4.5	1	1.6	21	18	100 PCS
K-100M	100	2.5	4.5	3.8	4.5	1	1.6	22	18	100 PCS
K-120M	120	2.5	4.5	3.8	4.5	1.1	1.6	28	18	100 PCS
K-140M	142	2.5	4.5	3.8	4.5	1.1	1.6	35	18	100 PCS
K-165M	165	2.5	4.5	3.8	4.5	1.1	1.6	43	18	100 PCS
K-200M	203	2.5	4.5	3.8	4.5	1.2	1.6	53	18	100 PCS
K-140I	142	3.6	6.7	5.4	6.8	1.25	2.5	33	40	100 PCS
K-150I	150	3.6	6.7	5.4	6.8	1.25	2.5	35	40	100 PCS
K-180I	180	3.6	6.7	5.4	6.8	1.3	2.5	44	40	100 PCS
K-200I	203	3.6	6.7	5.4	6.8	1.3	2.5	52	40	100 PCS
K-250I	250	3.6	6.7	5.4	6.8	1.3	2.5	65	40	100 PCS
K-300I	300	3.6	6.7	5.4	6.8	1.35	2.5	76	40	100 PCS
K-370I	368	3.6	6.7	5.4	6.8	1.3	2.5	102	40	100 PCS
K-120S	120	4.6	7.0	6.0	7.7	1.3	3.0	22	50	100 PCS
K-160S	160	4.6	7.0	6.0	7.7	1.3	3.0	38	50	100 PCS
K-190S	190	4.6	7.0	6.0	7.7	1.3	3.0	46	50	100 PCS
K-200S	203	4.6	7.0	6.0	7.7	1.3	3.0	50	50	100 PCS
K-250S	250	4.6	7.0	6.0	7.7	1.35	3.0	65	50	100 PCS
K-280S	280	4.6	7.0	6.0	7.7	1.35	3.0	75	50	100 PCS
K-300S	300	4.6	7.4	6.0	8.3	1.4	3.0	80	50	100 PCS
K-370S	368	4.6	7.4	6.0	8.3	1.4	3.0	102	50	100 PCS
K-385S	385	4.6	7.4	6.0	8.3	1.4	3.0	105	50	100 PCS
K-430S	432	4.6	7.4	6.0	8.3	1.45	3.0	120	50	100 PCS
K-160SD	160	4.8	7.0	6.0	7.7	1.3	3.0	42	50	100 PCS
K-190SD	190	4.8	7.0	6.0	7.7	1.3	3.0	52	50	100 PCS
K-200SD	203	4.8	7.0	6.0	7.7	1.3	3.0	55	50	100 PCS
K-250SD	250	4.8	7.0	6.0	7.7	1.35	3.0	74	50	100 PCS
K-300SD	300	4.8	7.4	6.0	8.3	1.4	3.0	80	50	100 PCS
K-370SD	368	4.8	7.4	6.0	8.3	1.4	3.0	102	50	100 PCS
K-430SD	432	4.8	8.1	6.0	8.2	1.45	3.0	125	50	100 PCS
K-530SD	530	4.8	8.1	6.0	8.2	1.45	3.0	150	50	100 PCS
K-610SD	610	4.8	8.1	6.0	8.2	1.45	3.0	170	50	100 PCS
K-150H	150	7.6	11.0	6.8	12.4	1.6	4.8	33	120	100 PCS
K-200H	203	7.6	11.0	6.8	12.4	1.6	4.8	50	120	100 PCS
K-250H	250	7.6	11.0	6.8	12.4	1.6	4.8	63	120	100 PCS
K-280H	280	7.6	11.0	6.8	12.4	1.6	4.8	74	120	100 PCS
K-300H	300	7.6	11.0	6.8	12.4	1.6	4.8	80	120	100 PCS
K-340H	340	7.6	11.0	6.8	12.4	1.6	4.8	92	120	100 PCS
K-370H	370	7.6	11.0	6.8	12.4	1.6	4.8	102	120	100 PCS
K-380H	380	7.6	11.0	6.8	12.4	1.6	4.8	105	120	100 PCS
K-450H	450	7.6	11.0	6.8	12.4	1.6	4.8	128	120	100 PCS
K-500H	500	7.6	11.0	6.8	12.4	1.6	4.8	143	120	100 PCS
K-550H	550	7.6	11.0	6.8	12.4	1.6	4.8	160	120	100 PCS
K-750H	750	7.6	11.0	6.8	12.4	1.76	4.8	223	120	100 PCS
K-430L	430	9.0	13.2	9.8	14.3	1.8	8.0	116	175	100 PCS
K-450L	450	9.0	13.2	9.8	14.3	1.8	8.0	124	175	100 PCS
K-550L	550	9.0	13.2	9.8	14.3	1.8	8.0	155	175	100 PCS
K-610L	610	9.0	13.2	9.8	14.3	1.8	8.0	175	175	100 PCS
K-710L	710	9.0	13.2	9.8	14.3	1.8	8.0	207	175	100 PCS
K-780L	776	9.0	13.2	9.8	14.3	1.8	8.0	228	175	100 PCS
K-810L	812	9.0	13.2	9.8	14.3	1.8	8.0	239	175	100 PCS
K-920L	920	9.0	13.2	9.8	14.3	1.8	8.0	274	175	100 PCS
K-1020L	1020	9.0	13.2	9.8	14.3	1.8	8.0	306	175	100 PCS
K-1220L	1220	9.0	13.2	9.8	14.3	1.8	8.0	367	175	100 PCS

STANDARD COLOR :

NATURE (WHITE)

BLACK: -B

GREY: -GY

RED: -RE

BLUE: -BL

YELLOW: -YL

GREEN: -GN

ORANGE: -OR

BROWN: -BR

PURPLE: -PP

FLUORESCENCE YELLOW: -FYL